



### Data Sheet

**System:** Nickel Metal Hydride/  
KOH Electrolyte

**Nominal Voltage [V]:** 1.2

**Typical Capacity C [mAh]:** 40  
at 8 mA/1.0 V

**Weight,approx,[g]** 1.8

**Dimensions [mm]:** **min.** **max.**

**Diameter [d]:** 11.4 11.8

**Height [h]:** 5.0 5.4

**Temperature Ranges [°C]** **min.** **max.**

**Storage:** less than 30 days -40 80

less than 90 days -40 65

less than 1 year -40 50

**Discharge:** -20 80

**Charge:** 0 80

**Charging Method:**

**Typical Charging:** 4 mA for 14-16 h

**Accelerated Charging (20°C):** 8 mA for 7 h

**Fast Charging:** 20 mA for 3 h\*

Time controlled,voltage control recommended

**Trickle Charging:** 1.2 mA

**Overcharge (20°C):** 4 mA continuous

**Charge Retention [%] at 20°C:** 90

Capacity available after 1 month Storage at 20°C

**Life Expectancy (typical):**

**IEC Cycle:** 500 Cycles

**Trickle Charge:** up to 5 years (20°C )

**Destructive Test:**


1.Charge at 8mA at 85°C for 7 days

2.Discharge at 8mA at 20°C to 1.0 V

3.Charge at 4mA at 20°C for 15 h

4.Discharge at 8mA at 20°C to 1.0 V

Repeat 1-4 for 6 cycles. Capacity more than 60%

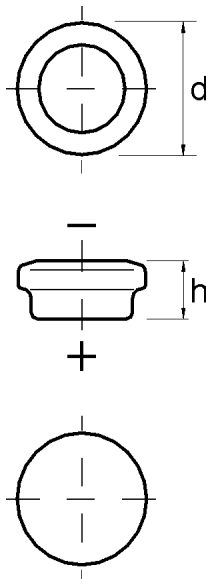

\* for fully discharged cells, 20°C